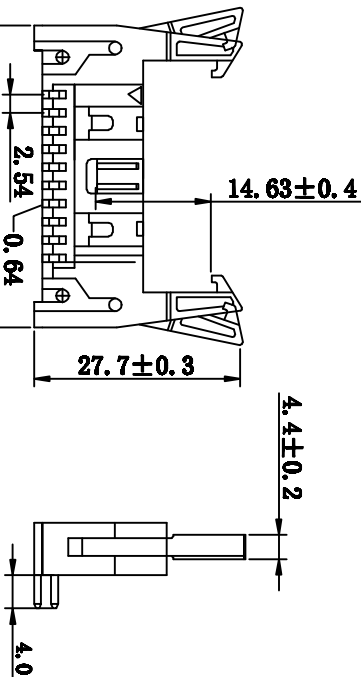



1. MATERIALS AND FINISH
- 1.1 HOUSING MATERIALS:
- PBT
- 1.2 CONTACTS:
- Brass

- 1.3 PLATING:
- PLATING GOLD OVERALL
- UNDERPLATING NICKEL

2. SPECIFICATIONS

- 2.1 CURRENT RATING:
- 1AMP. MAX
- 2.2 INSULATION RESISTANCE:
- 100MΩ MIN AT 500V DC
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:
- 500V (r.m.s) AC FOR 1 MINUTE.
- 2.4 OPERATING TEMPERATURE:
- 40° C TO +85□.


NUMBER	Dimensions			
	A	B	C	OF POSITION
10	32.00	10.16	27.94	
14	37.08	15.24	33.02	
16	39.62	17.78	35.56	
20	44.70	22.86	40.94	
24	49.78	27.94	45.72	
26	52.32	30.48	48.26	
30	57.40	35.56	53.34	
34	62.48	40.64	58.42	
40	70.10	48.26	66.04	
50	82.80	60.96	78.74	
60	95.50	73.66	91.44	
64	100.58	78.74	96.72	

深圳市山谷道电子有限公司

电话：0755-27759859
传真：0755-27759850

HEADER PH2.54mm DIP 90度

Customer:	Approval:	Unit	Scale	Date
Drawing No:	Check:	mm		07.05.08



P/NO:

Pin Longer:

Signatur: