
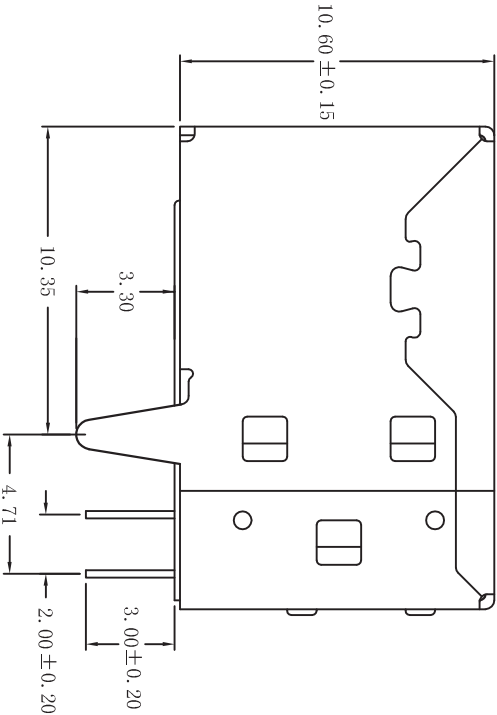


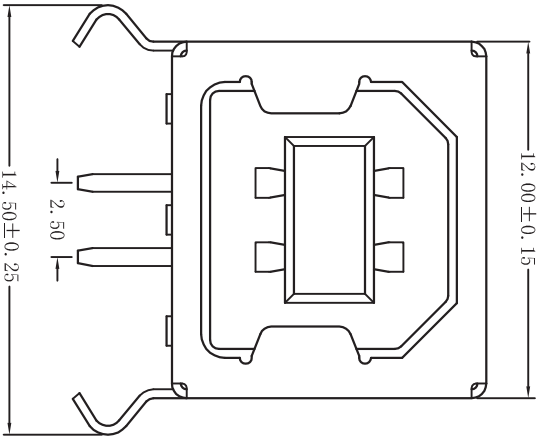

特性:Specifications:
电器:Electrical:



1. 接触阻抗:Contact Resistance 30 milliohms MAX
2. 耐电压:Dielectric Withstanding Voltage: 500 V AC AT Sea Level
3. 绝缘阻抗:Insulation Resistance: 1000MEGA ohms MIN

材料:Matorial:

1. 塑胶:Housing:Hing Temperature Thermaplasi
2. 端子:Contact:Copper Alloy 铜合金
3. 铁壳:Shell: Copper Alloy铜/铁合金

电镀:Finish:

- 1 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Tails
接触点镀金, 脚镀锡
2. 铁壳:Shell: Nickel Plating 镀镍

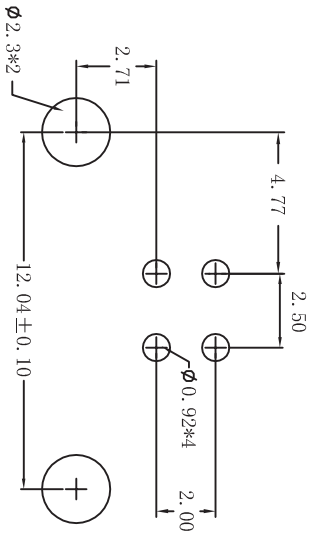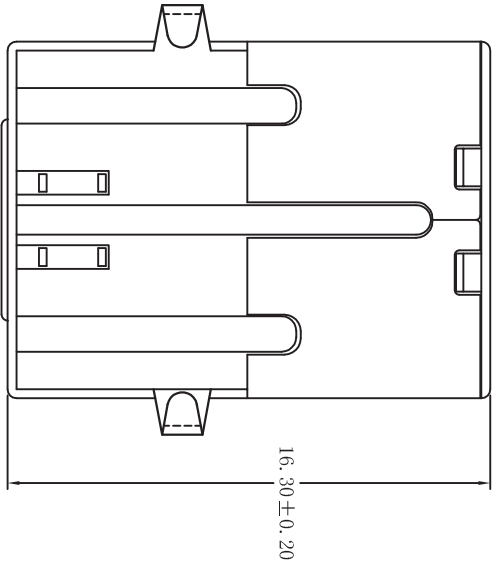

深圳市山谷道电子有限公司
电话: 0755-27759859 传真: 0755-27759850



品名	USB B转90° 插板式	材质		单位	MM
图号	CP-USB007-1A	图纸编号		比例	1:1
制图		审核		日期	