

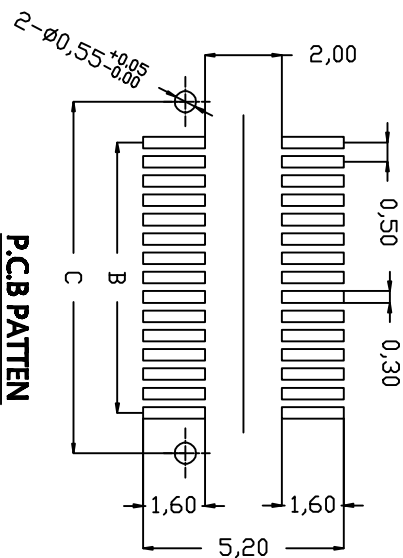
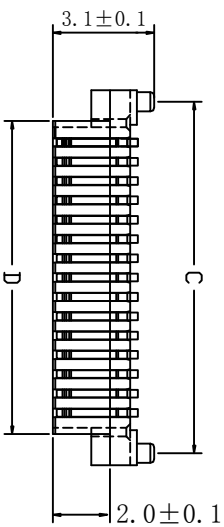
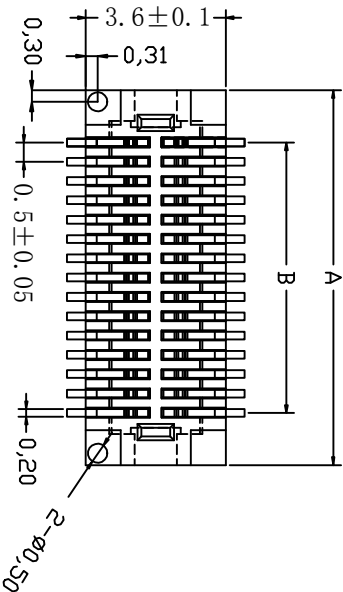


High photos/rhtests (H1)	The female seat height (H11)	The male seat height (H12)	Insertion height (H13)
5.0±0.15	4.3±0.1	2.7±0.05	2.0±0.1




Electrical:
Vlotag Rating:50V AC(rms)/DC
Current Rating:0.5A AC(rms)/DC
Contact Resistance:50mΩ Max
Insulation Resistance:100 MΩ min
Dielectric Withstanding Voltage:200V AC r.m.s
Operating Temperature:-30℃~+80℃
Materials
Housing:High Temperature Plastic
UL94V-0
Terminal:Copper Alloy
Material:LCP NC
Contact:phosphor Bronze,Gold Plating:



NO. of Contacts	Dimension (mm)			
	A±0.10	B±0.10	C±0.10	D±0.10
20	7.20	4.50	6.60	5.60
30	9.70	7.00	9.10	8.10
40	12.20	9.50	11.60	10.60
50	14.70	12.00	14.10	13.10
60	17.20	14.50	16.60	15.60
80	22.20	19.50	21.60	20.60

Ordering Information

SGD-05-M-XXXXP-27-G2 X

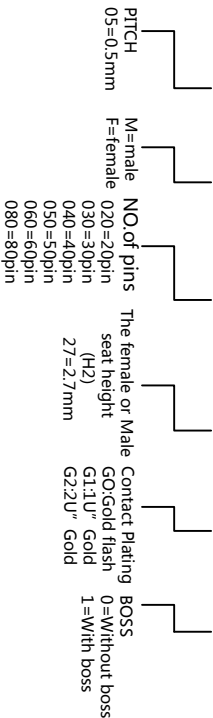

单位	M	M	尺寸公差		山谷道深圳市山谷道电子有限公司 SHENZHEN SHANGDAO ELECTRONIC CO.,LTD				
日期	14.08.30		0.05	±0.05					
比例	1:1		0	±0.10					
绘制			角度公差	±0.20					
校对			0.0	±1°	物料编号	SGD-05-M-XXXXP-27-G21/0			
审核			版本	±0.5°	品名	0.5mm BOARD TO BOARD 公差 单槽 立式式			
			视角	A	包装规格	卷带:1000PCS/R			
					图号	xx001			