


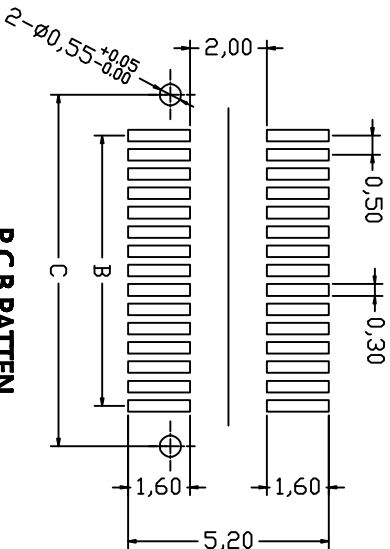
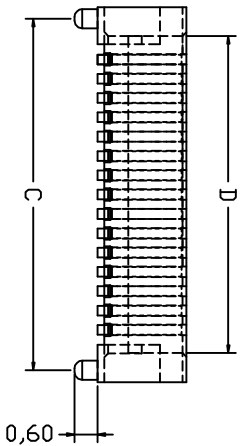


High photosynthesis (H)	The female seat height (H1)	The male seat height (H2)	Insertion height (H3)
5.0 ± 0.15	4.3 ± 0.1	2.7 ± 0.05	2.0 ± 0.1

Electrical:
V₁otag Rating:50V AC(rms)/DC
Current Rating:0.5A AC(rms)/DC
Contact Resistance:50mΩ Max
Insulation Resistance:100MΩ min
Dielectric Withstanding Voltage:200V
AC r. m. s
Operating Temperature:-30℃~+80℃
Materials
Housing:High Temperature Plastic
UL94V-0
Terminal:Copper Alloy
Material: LCP NC
Contact:phosphor Bronze, Gold Plating::

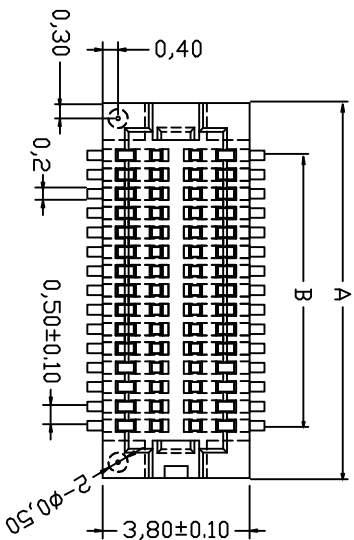


ASSEMBLY



No. of Contracts	Dimension (mm)			
	A $\pm$ 0.10	B $\pm$ 0.10	C $\pm$ 0.10	D $\pm$ 0.10
20	7.20	4.50	6.60	5.70
30	9.70	7.00	9.10	8.20
40	12.20	9.50	11.60	10.70
50	14.70	12.00	14.10	13.20
60	17.20	14.50	16.60	15.70
80	22.20	19.50	21.60	20.70

Ordering Information

SGD-05 - F - XXXP-43 - G2 X

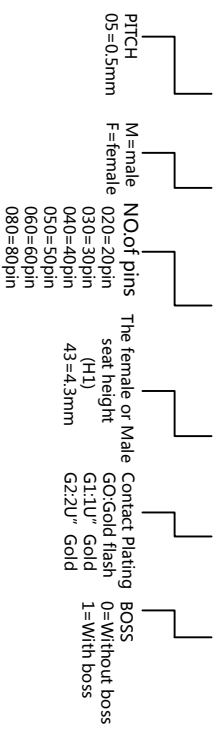

单位	M	M	尺寸公差			
日期	14.08.30	0.0	0	±0.05		
比例	1:1	0.0	0	±0.20		
		角度公差				
绘制		.0		±1°		
校对		0.0		±0.5°		
审核	视角					
						
包装规格		物料编号				
卷带1000PCS/R		图号				
xmd01		品名				
		SGD-05-F-xxxP-43-G21/0				
		0.5mm BGAED TO BGAED 母座 单槽 立式式				